





Model -DF140S1 : D Type LyTec Fiber (PINK) D 型麗特冷光綫 (粉紅色)

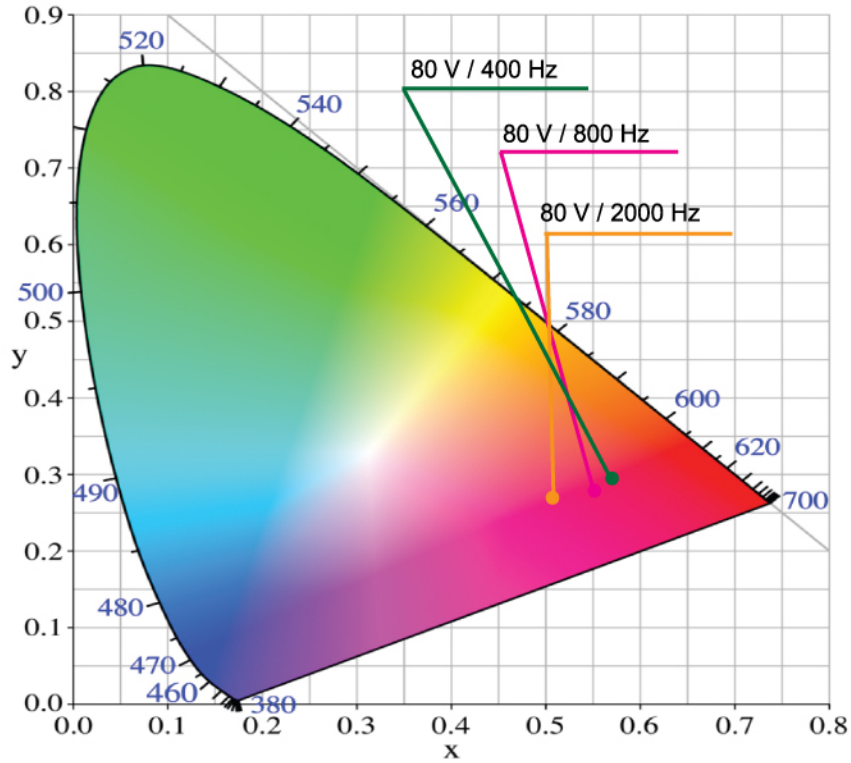

Typical Chromaticity Coordinates 冷光綫色度坐標

| Voltage 電壓 Frequency 電頻 | Chromaticity Coordinates 色度坐標 | |
|----------------------------|-------------------------------|-------|
| | X | Y |
| 80V / 400Hz | 0.571 | 0.310 |
| 80V / 800Hz | 0.553 | 0.299 |
| 80V / 2000Hz | 0.512 | 0.275 |

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

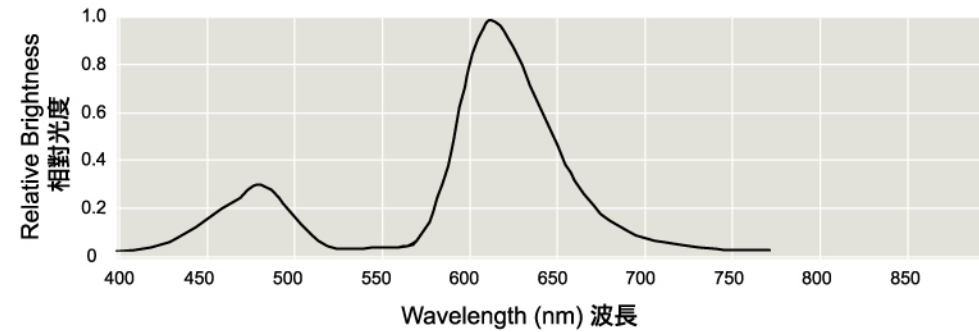

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

| V, 伏 | 200Hz | 400Hz | 800Hz | 2000Hz | 4000Hz |
|------|-------|-------|-------|--------|--------|
| 40V | - | 2.5 | 4.5 | 7.5 | 10.5 |
| 50V | - | 5.5 | 9.0 | 15.5 | 22.5 |
| 60V | - | 9.5 | 16.0 | 27.5 | 38.0 |
| 70V | - | 14.0 | 23.0 | 40.0 | 56.0 |
| 80V | - | 19.0 | 31.5 | 55.0 | 78.5 |

Typical Initial Reference Brightness 冷光綫始光度參考值

