





# Model - MN112S1 : Mini LyTec Fiber (PINK) 微型麗特冷光綫 (粉紅色)

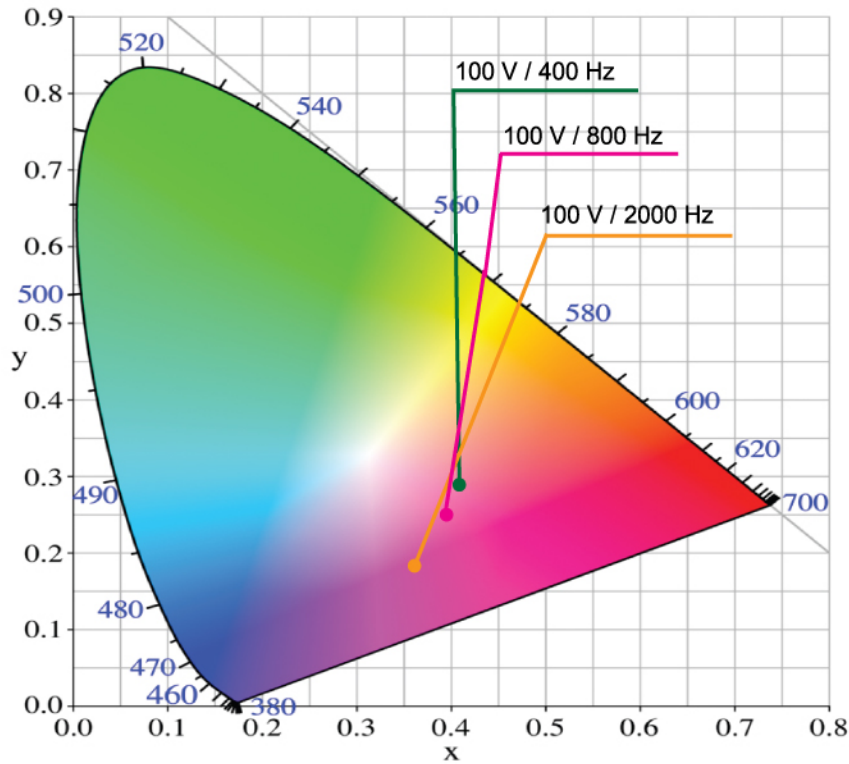

Typical Chromaticity Coordinates 冷光綫色度坐標

| Voltage 電壓<br>Frequency 電頻 | Chromaticity Coordinates 色度坐標 |       |
|----------------------------|-------------------------------|-------|
|                            | X                             | Y     |
| 100V / 400Hz               | 0.413                         | 0.287 |
| 100V / 800Hz               | 0.392                         | 0.268 |
| 100V / 2000Hz              | 0.352                         | 0.228 |

Fiber Spectrum at 100V/2000Hz 冷光綫光譜在 100伏/2000赫茲

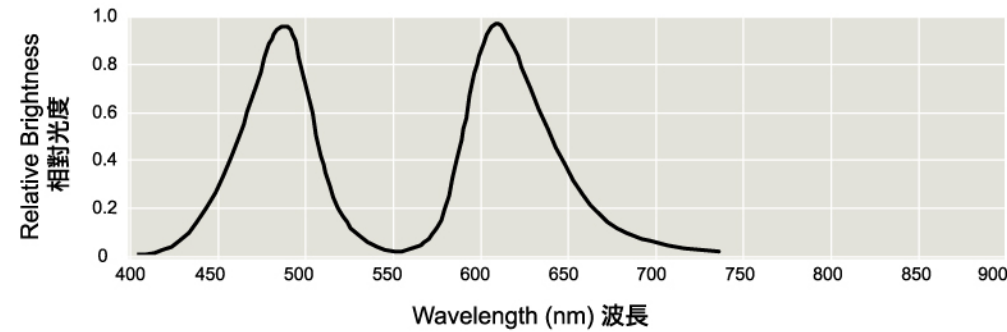

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

| V, 伏 | 200Hz | 400Hz | 800Hz | 2000Hz | 4000Hz |
|------|-------|-------|-------|--------|--------|
| 40V  | 0.2   | 0.4   | 0.6   | 0.9    | 1.3    |
| 60V  | 0.9   | 1.6   | 2.6   | 4.5    | 6.5    |
| 80V  | 2.1   | 3.7   | 6.3   | 11.0   | 15.7   |
| 100V | 3.6   | 6.6   | 11.1  | 19.5   | 28.2   |
| 120V | 5.5   | 9.7   | 16.7  | 29.7   | 42.1   |

Typical Initial Reference Brightness 冷光綫始光度參考值

