





# Model -TF232S1 : T Type LyTec Fiber (PINK) T 型麗特冷光綫 (粉紅色)

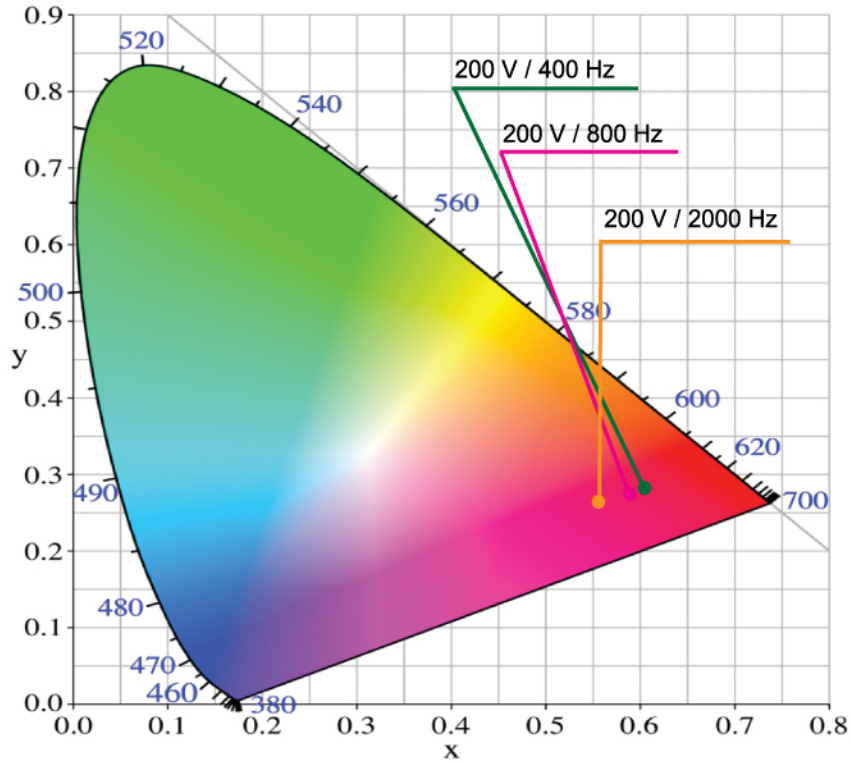

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
200V / 400Hz	0.615	0.309
200V / 800Hz	0.596	0.301
200V / 2000Hz	0.567	0.283

Fiber Spectrum at 200V/2000Hz 冷光綫光譜在 200伏/2000赫茲

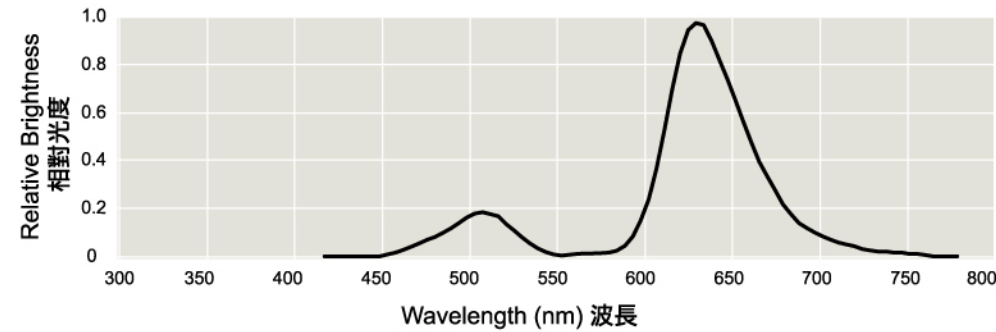

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	400Hz	800Hz	1200Hz	1600Hz	2000Hz
40V	-	-	-	-	-
80V	7.0	12.0	16.0	19.0	21.0
120V	18.0	31.0	42.0	50.0	57.0
160V	33.0	57.0	75.0	90.0	102.0
200V	48.0	83.0	110.0	132.0	150.0

Typical Initial Reference Brightness 冷光綫始光度參考值

